



XL Crate Information

Take care of the glass.

When handling EuroKera Ceramic-Glass, please be sure to follow these safe and efficient crate* handling techniques and recommendations.


Features

Weight

- Out of charge: 155 kg
- With sheets: 1501.4 kg

Sheets

- 2000 x 1 100 mm (usable width)
- 4 or 5 mm thickness
- 50 sheets of 4 mm per crate
- 40 sheets of 5 mm per crate

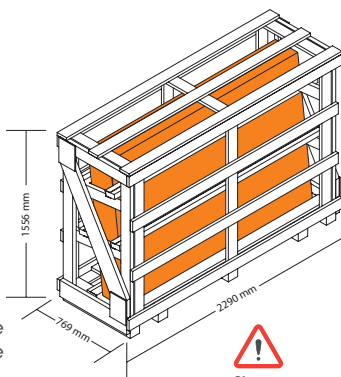

Sheets are already tilted inside the box.

Handling Precautions

External



Internal



Forbidden (except for truck loading/unloading)



Stacking on 1 level maximum.



The 2 horizontal wood bars must be set up before any crate moving**

* Crates are in accordance with the ISPM No. 15 standard.

** See image 5 on reverse.

KERALITE® GLASS-CERAMIC





XL Crate Information

Take care of the glass.

Recommendations

The following steps are recommended prior to unloading sheets from the XL crate.

- 1) Unscrew the top
(7 screws identified by red marks)
- 2) Remove the top
- 3) Unscrew the frontage
(9 screws)
- 4) Remove the frontage
- 5) Unscrew and remove the 2
horizontal wood bars

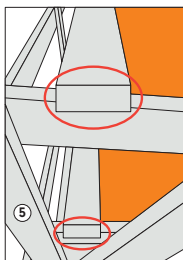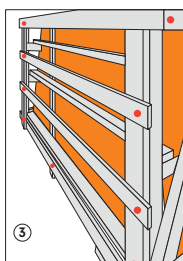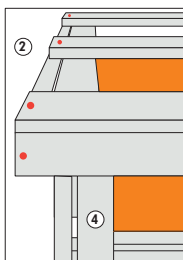

Keraglass SNC | Rue Saint-Laurent
77167 Bagneaux sur Loing | France
info_keralite@eurokera.com
www.eurokera.com