

KeraLite® with Anti-Reflective Coating

Improve the view of the fire.



Standard glass-ceramic has a natural reflectance of approximately 8%. With an **anti-reflective coating applied to both sides**, glare is reduced to about 1%.

The anti-reflective coating is applied to minimize glare, making it **virtually invisible** when viewed at a 90° angle.

With only **1% reflectance** in the visible range, light reflection is virtually imperceptible to the human eye, allowing a clear, unobstructed view of the fire.*

Characteristics



- L 2100 x H 1266 mm
- Usable surface:
2050 x 1216 mm
- Thickness 4 or 5 mm
- Cut-to-size



- Reflection 1% (+/- 0.5)
visible range
- Applied to both sides



650°C (1200°F)/100 h



Homogeneous color




Gas application only
(no wood, no pellets)

* Under special light conditions and angles of view, one can see small differences in the reflection and small iridescent light effects.

Technical Data

The anti-reflective coated glass-ceramic* has a **low reflection in the visible range** compared to uncoated glass-ceramic.

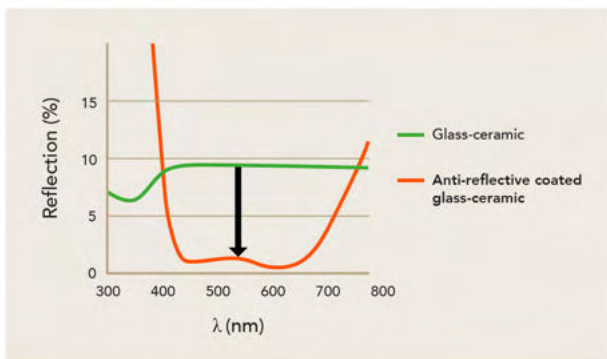

Dimensions

- Sheet size: 2100 x 1266 x 4 or 5 mm
- Usable surface: 2050 x 1216 mm (after removal of defects due to coating process)

Packaging

- Wood A-frame:
 - 4 mm: 20 sheets
 - 5 mm: 25 sheets
- Each sheet separated by protective layer

Important

- Fully processed, cut-to-size parts are available with an identification sticker applied to the coated side
- When cleaning, do not use strong alkalis, acids, fluoride-based detergents, abrasive cleaning tools, or solvents for cleaning

eurokera

EuroKera

7 Avenue de Tivoli,
02400 Chierry, France

eurokera.com

KeraLite®